

Material:

Housing: 30% Glass filled PBT UL94V-0.

Contacts: Brass.

Plating: Selective gold plated: gold plated on mating area and nickel plated on wire cutting area.

Electrical Characteristics:

Current Rating: 1 AMP.




Insulator Resistance: 5000MΩmin. at DC 500V.

Contact Resistance: 20mΩmax. at DC 100mA.

Operating Temperature: -55°C ~ +105°C.

Features:

- * Fully shrouded provides ultimate reliability.
- * With polarization.
- * Mounting ears optional.

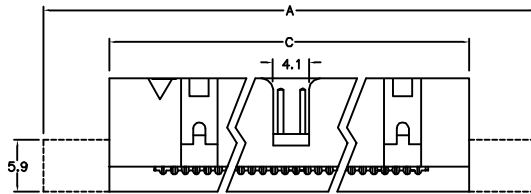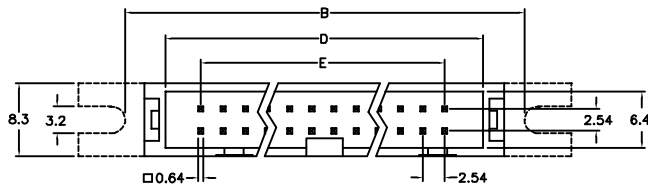

Position	Dimension				
	A	B	C	D	E
10	38.00	27.94	22.98	17.93	10.16
14	43.08	33.02	28.10	22.93	15.24
16	45.70	35.56	30.64	25.55	17.76
20	50.70	40.64	35.70	30.56	22.86
26	58.26	48.26	43.26	38.20	30.48
30	63.34	53.34	48.44	43.40	35.56
34	68.40	58.42	53.28	48.30	40.64
40	76.14	66.04	60.96	56.08	48.26
50	88.82	78.74	73.72	68.70	60.96
60	101.38	91.44	86.44	81.34	73.66
64	106.80	96.52	91.46	86.43	78.74

Ordering information

BX03- 64 1 Y 1 1
 Series No. of Pin Count 3: Selective 1: Gold Plated Y: Grey B: Black 1: With Mounting Ears 2: Without Mounting Ears 1: With Strain Relief 2: Without Strain Relief