


Box Header 2.0mm(0.079")

GXCON

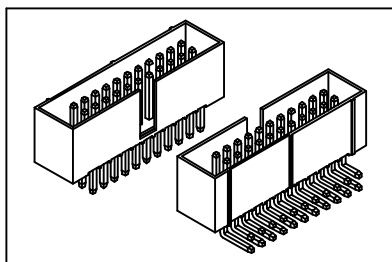

Material:

Housing: High temperature housing withstands

IR and VPR soldering methods.

Contacts: Brass.

Plating: Gold plated over nickel.

Electrical Characteristics:

Current Rating: 1 AMP.






Insulator Resistance: 5000MΩmin. at DC 500V.

Contact Resistance: 20mΩmax. at DC 100mA.

Operating Temperature: -55°C ~ +105°C.

Features:

- * Straight & Right Angle Type.
- * Fully shrouded for better protection.
- * Two different color insulator to meet customer's choice.

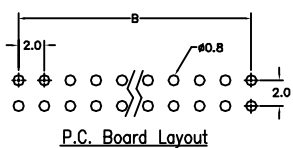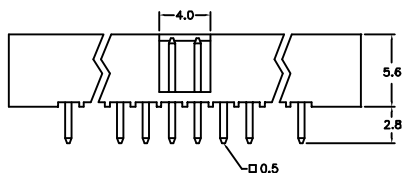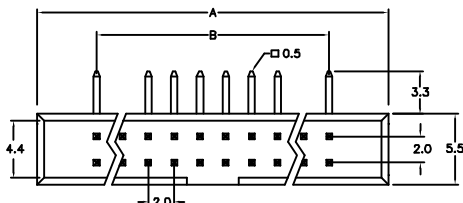

Position	10 Thru 68
Dimension	
A	2.0 X No. of Positions /2+7.2
B	2.0 X No. of Positions /2-2.0

Ordering information

BX11- 68 1 1 B
 Series No. of 1: Gold Plated 1: Straight B: Black
 Pin Count 2: Right Angle