Box Header With Ejectors
1.27mmX2.54mm(0.050"X0.100")

GXCON

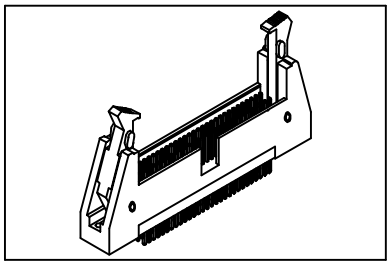

Material:

Housing: 30% Glass filled PBT UL94V-0.
Contacts: Brass.
Plating: Gold plated over nickel.
Tin plated over nickel.
Selective gold plated: Gold plated on mating area and tin plated on solder tail.

Electrical Characteristics:

Current Rating: 0.5 AMP.
Insulator Resistance: 5000MΩmin. at DC 500V.
Contact Resistance: 20mΩmax. at DC 100mA.
Operating Temperature: -55°C~+105°C.

Features:

* Straight Type.
* Optional Eject lever 24.05mm(0.95").
* Choice of black or grey insulator.
* 4 row 1.27mm(0.05") zigzag PCB layout.





P.C. Board Layout Top View
(26,34,50 Position)







P.C. Board Layout Top View
(20,32,40,52,60,68,80,100 Position)





Long Lever



Short Lever

Position	Dimension				
	A	B	C	D	E
20	32.36	11.43	29.35	18.75	21.59
26	36.18	15.24	33.16	22.56	25.40
32	39.98	19.05	36.97	26.37	29.21
34	41.25	20.32	38.24	27.64	30.48
40	45.06	24.13	42.05	31.45	34.29
50	51.41	30.48	48.40	37.80	40.64
52	52.68	31.75	49.67	39.07	41.91
60	57.76	36.83	54.75	44.15	46.99
68	62.84	41.91	59.83	49.23	52.07
80	70.46	49.53	67.45	56.85	59.69
100	83.16	62.23	80.25	69.55	72.39

Ordering information

BX23-	100	1	1	B	1
Series	No. of Pin Count	3: Selective Gold Plated 1: Gold Plated 2: Tin Plated	1: Straight	B: Black *Y: Grey	1: With Long Ejector 2: With Short Ejector 3: Without Ejector

PDF 文件使用 "pdfFactory Pro" 试用版本创建 www.fineprint.cn