


Centronic Connector Straight Type

GXCON

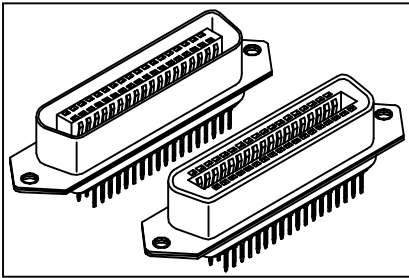


Material:

Housing: PBT, UL94V-0 Rated.
Contacts: Phosphor Bronze.
Plating: Selective gold plated on contact area nickel.
Shell: Cold Roller Steel.

Electrical Characteristics:

Current Rating: 1 AMP.
Dielectric Withstanding Voltage: AC 1000V For 1 minute.
Insulator Resistance: 1000MΩmin. at DC 500V.
Contact Resistance: 30mΩmax.
Operating Temperature: -55°C~+105°C.

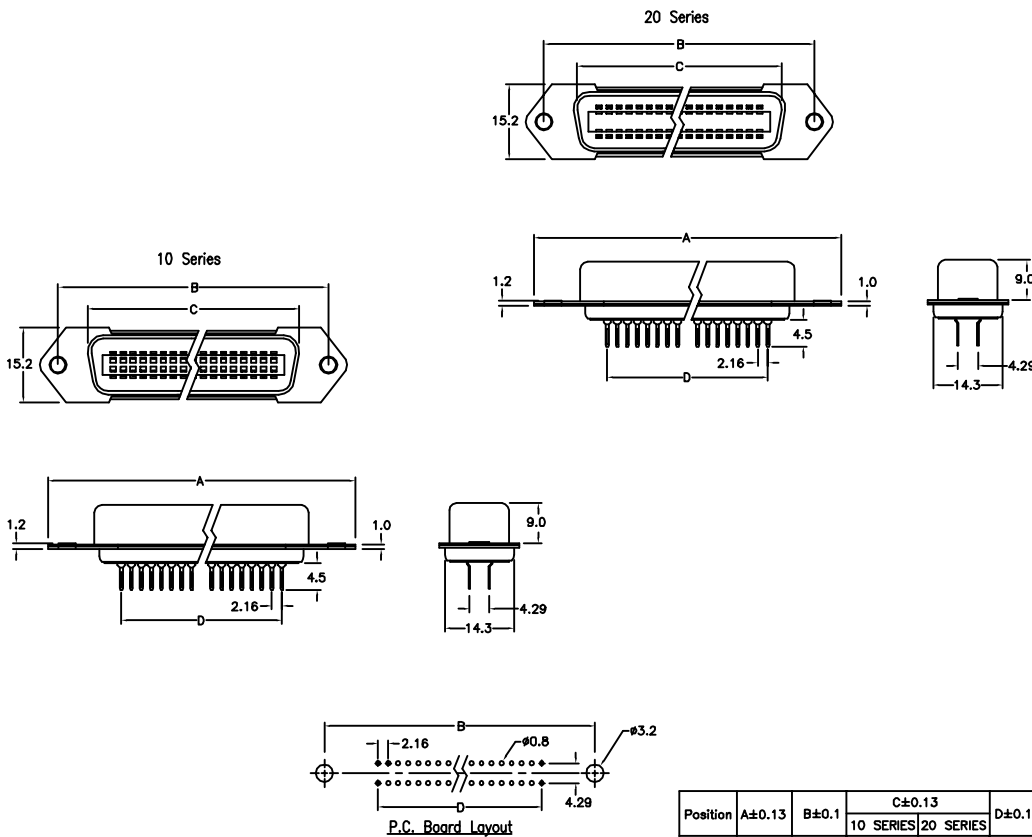

Position	A±0.13	B±0.1	C±0.13		D±0.13
			10 SERIES	20 SERIES	
14	43.7	35.99	25.6	25.2	12.96
24	54.5	46.79	36.47	36.0	23.76
36	67.6	59.74	49.35	48.9	36.72
50	82.8	74.85	64.47	64.0	51.84

Ordering information

571- 10 500
 Series 10: Male 140: 14 Pin
 20: Female 240: 24 Pin
 360: 36 Pin
 500: 50 Pin