


# Centronic Connector Solder Type

# GXCON

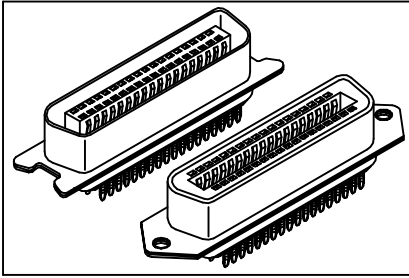

**Material:**

**Housing:** PBT, UL94V-0 Rated.

**Contacts:** Brass.

**Plating:** Selective gold plated on contact area nickel.

**Shell:** Cold Roller Steel.

**Electrical Characteristics:**


**Current Rating:** 1 AMP.

**Dielectric Withstanding Voltage:** AC 1000V For 1 minute.

**Insulator Resistance:** 1000MΩmin. at DC 500V.

**Contact Resistance:** 30mΩmax.

**Operating Temperature:** -55°C~+105°C.

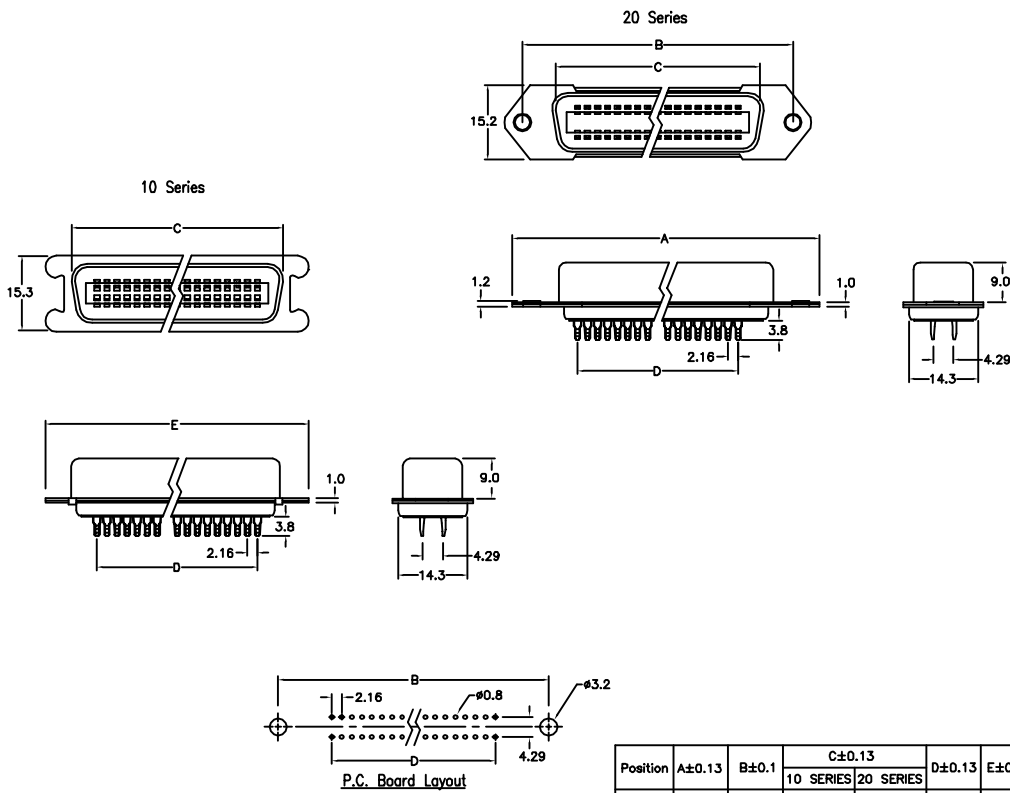

Position	A±0.13	B±0.1	C±0.13		D±0.13	E±0.13
			10 SERIES	20 SERIES		
14	43.7	35.99	25.6	25.2	12.96	38.5
24	54.5	46.79	36.47	36.0	23.76	49.3
36	67.6	59.74	49.35	48.9	36.72	62.0
50	82.8	74.85	64.47	64.0	51.84	77.4

**Ordering information**

575- 10 500  
 Series 10: Male 140: 14 Pin  
 20: Female 240: 24 Pin  
 360: 36 Pin  
 500: 50 Pin