


Centronic Connector Solder Type

GXCON




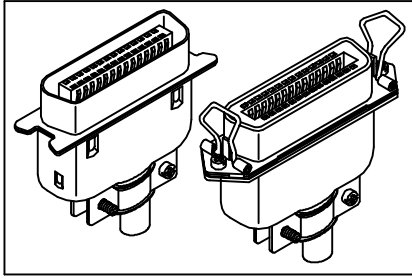


Material:

Housing: PBT, UL94V-0 Rated.
Contacts: Brass.
Plating: Selective gold plated on contact area nickel.
Shell: Cold Roller Steel.

Electrical Characteristics:

Current Rating: 1 AMP.
Dielectric Withstanding Voltage: AC 1000V For 1 minute.
Insulator Resistance: 1000MΩmin. at DC 500V.
Contact Resistance: 30mΩmax.
Operating Temperature: -55°C~+105°C.

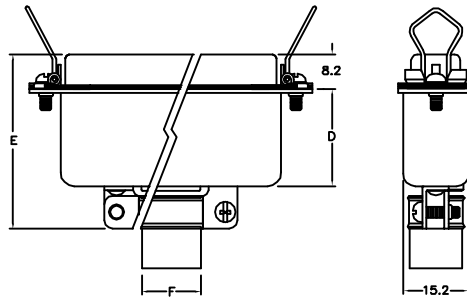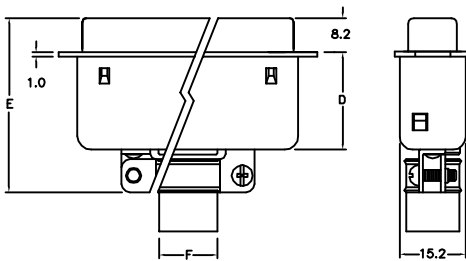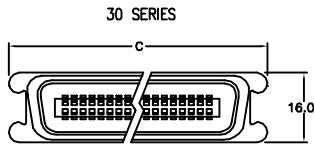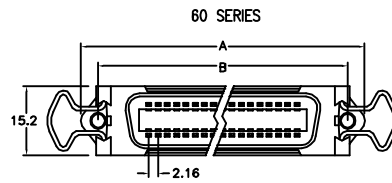

Position	A	B	C	D	E	F
14	43.9	36.0	37.8	21.4	41.4	7.6X10.4
24	54.7	46.8	48.6	21.0	41.0	∅11.8
36	67.7	59.7	61.6	23.0	42.4	15.8X11.8
50	82.8	74.9	76.7	25.4	45.0	19X11.8

Ordering information

576- 30 500
 Series 30: Male 140: 14 Pin
 60: Female 240: 24 Pin
 360: 36 Pin
 500: 50 Pin