

Material:






Housing: 30% Glass filled PBT UL94V-0.
 Contacts: Phosphor Bronze.
 Plating: Gold plated.

Electrical Characteristics:

Current Rating: 1 AMP.
 Insulator Resistance: 5000MΩmin. at DC 500V.
 Contact Resistance: 20mΩmax. at DC 100mA.
 Operating Temperature: -55°C~+105°C.

Features:

- * UL cUL Listing.
- * Recommended 1.27mm Flat cable.
- * Easy to assembly.

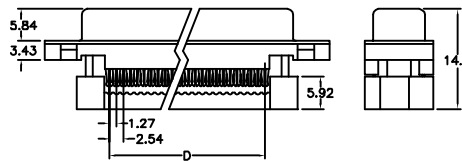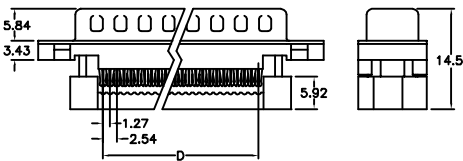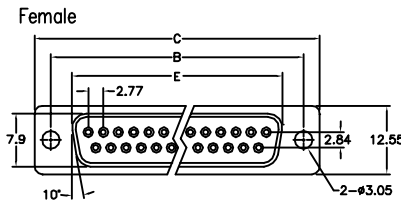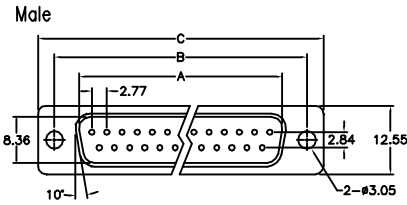

Position	Dimension				
	A	B	C	D	E
9	16.92	25.00	30.80	10.16	16.30
15	25.25	33.32	39.10	17.78	24.50
25	38.96	47.04	53.10	30.48	38.30
37	55.45	63.50	69.50	45.72	54.80

Ordering information

DB01- 37 M M O U 3
 Series Position M: Male M: Metal Shell N: With 4-40 Thread Insert U: Blue 3: Selective
 F: Female P: Plastic O: Without 4-40 Thread Insert B: Black Gold Plated
 Y: Gray