


Slim D-SUB Right Angle Type

GXCON

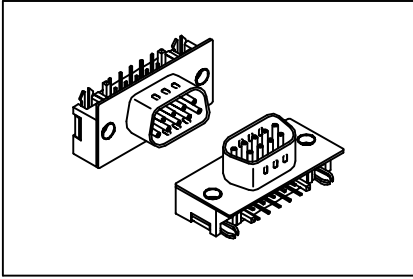

Material:

Housing: High temperature housing UL94V-0 withstands IR and VPR soldering methods.

Contacts: Phosphor Bronze.

Plating: Selective Gold plated.

Electrical Characteristics:





Current Rating: 1 AMP.

Insulator Resistance: 5000MΩmin. at DC 500V.





Contact Resistance: 20mΩmax. at DC 100mA.

Operating Temperature: -65°C~+125°C.





Max Processing Temperature: 230°C for 30~60 seconds.



Footprint 1 P.C. Board Layout
DB03-09M321/L5



Footprint 2 P.C. Board Layout
DB03-09M322/L4



Footprint 3 P.C. Board Layout
DB03-09M323/L4

Ordering information

DB03-	09	M	3	2	1	/L4
Series	Position	Male	3: Selective Gold Plated	2: Right Angle	1: Footprint 1	Lock Type See Above
					2: Footprint 2	
					3: Footprint 3	