

Material:







Housing: 30% Glass filled PBT UL94V-0.
 Contacts: Brass.
 Plating: Gold plated.

Electrical Characteristics:

Current Rating: 1 AMP.
 Insulator Resistance: 5000MΩmin. at DC 500V.
 Contact Resistance: 20mΩmax. at DC 100mA.
 Operating Temperature: -55°C ~ +105°C.

Features:

* UL cUL Listing.
 Mates with: 7917, 7918.

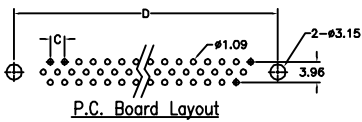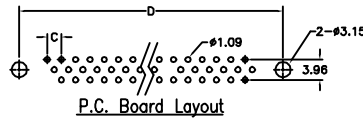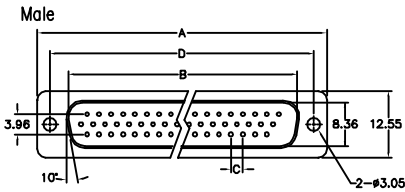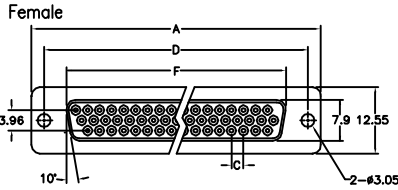

Position	Dimension					
	A	B	C	D	E	F
15	30.8	16.9	2.29	24.99	19.3	16.3
26	39.1	25.3	2.29	33.32	27.5	24.7
44	53.0	40.1	2.29	47.04	41.3	38.4
62	69.3	56.8	2.41	63.50	57.7	54.8

Ordering information

HDB04- 62 M I B 3 N1
 Series Position M: Male T: Tin Shell B: Black C: Selective Gold Plated Blank: Standard Type
 F: Female E: Zinc Shell U: Blue N1: See Page B52
 W: White