


H.D. D-SUB Right Angle Type

GXCON

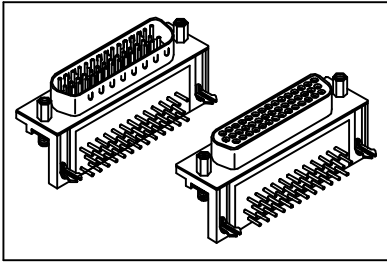

Material:


Housing: 30% Glass filled PBT UL94V-0.
 Contacts: Brass.
 Plating: Gold plated.

Electrical Characteristics:

Current Rating: 1 AMP.
 Insulator Resistance: 5000MΩmin. at DC 500V.
 Contact Resistance: 20mΩmax. at DC 100mA.
 Operating Temperature: -55°C ~ +105°C.

Features:

* UL cUL Listing.

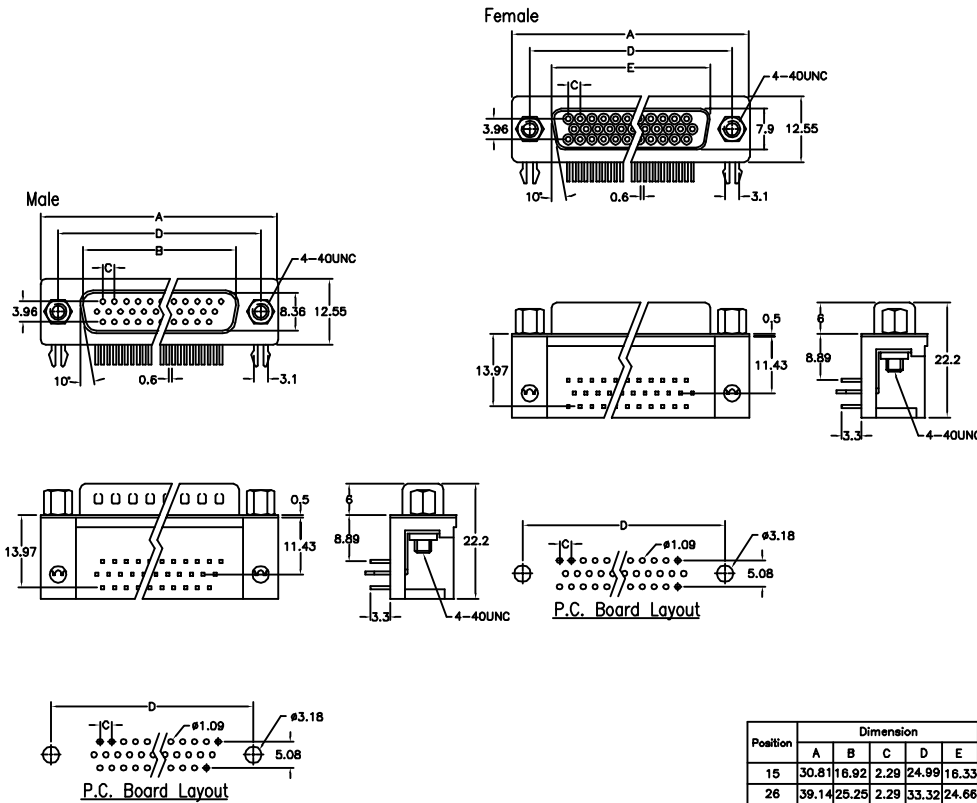

Position	Dimension				
	A	B	C	D	E
15	30.81	16.92	2.29	24.99	16.33
26	39.14	25.25	2.29	33.32	24.66
44	53.04	38.96	2.29	47.04	38.38
62	69.32	55.42	2.41	63.50	54.84

Ordering information

HDB05- 62 F A
 Series Position M: Male A ~ Z: See Page B58 ~ B61
 F: Female