4001 Series

Circular Din Jack Right Angle P.C.B Mount Type

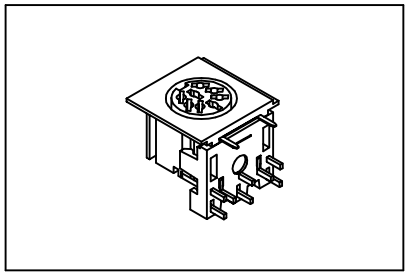

Material:

Housing: 15% Glass filled PBT UL94V-0.
Contacts: Brass, Tin Plated.
Ground: Brass, Nickel Plated.

Electrical Characteristics:

Current Rating: 1 AMP.
Insulator Resistance: 100MΩmin. at DC 500V.
Contact Resistance: 20mΩmax.
Operating Temperature: −55°C ~+105°C.
Insertion Force: 0.5~5.0Kg.
Withdrawal Force: 0.4~5.0Kg.
Durability Test: 5000 mating cycles min.





No. of Contact	3P	4P	6P	7P	8P
Position					
Hole Layout (Top View)					
Part No.	4001-3	4001-4	4001-6	4001-7	4001-8

Ordering information

4001- X A

4001- : Series

X : Position 3, 4, 6, 7, 8

A :
A: Foot Print 5.0mm
B: Foot Print 10.0mm

PDF created with FinePrint pdfFactory trial version http://www.pdffactory.com