


4007 Series

Full Shield Mini Din Jack P.C.B Type

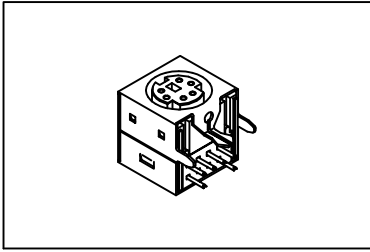


Material:

Housing: 15% Glass filled PBT UL94V-0.
Contacts: Phosphor Bronze, selective gold Plated.
Panel Gnd: Stainless, Nickel Plated.

Electrical Characteristics:

Contact Resistance: 30mΩmax.
Insulation Resistance: 100MΩAT 500V DC.
Rating: DC 12V, 1.0A max.
Dielectric Withstanding Voltage: 500V AC(RMS) applied between adjacent open terminals for 1 minute without breakdown.

Operating Temperature: -55°C ~ +105°C.
Insertion Force: 0.5~4.5Kg.
Withdrawal Force: 0.4~3.5Kg.
Durability Test: 5000 mating cycles min.

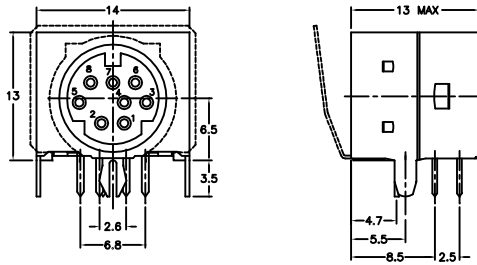

No. of Contact	3P	4P	5P	6P	7P	8P
Position						
Hole Layout (Bottom View)						
Part No.	4007-3	4007-4	4007-5	4007-6	4007-7	4007-8

Ordering information

4007- X A F
 Series Position 3, 4, 5, 6, 7, 8 A: With Spring With Filter
 B: W/O Spring Blank: W/O Filter

* Standard Color Black, Available Purple, Green for 6P.