
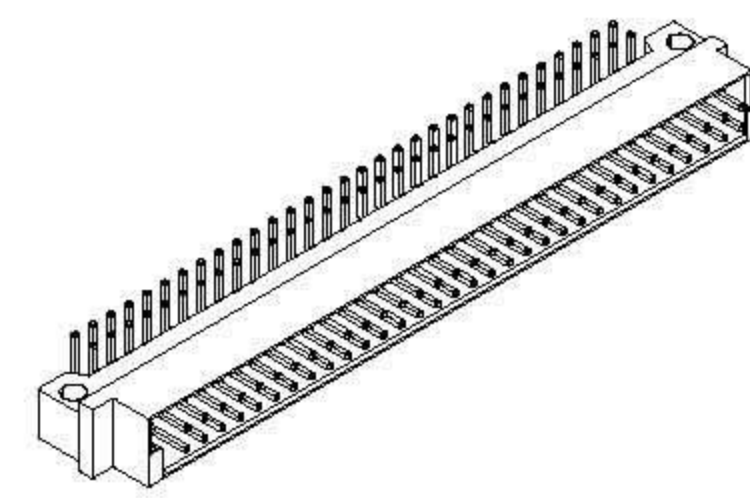


REV.	SPECIFICATION	ECN NO.	APPD.
A6			

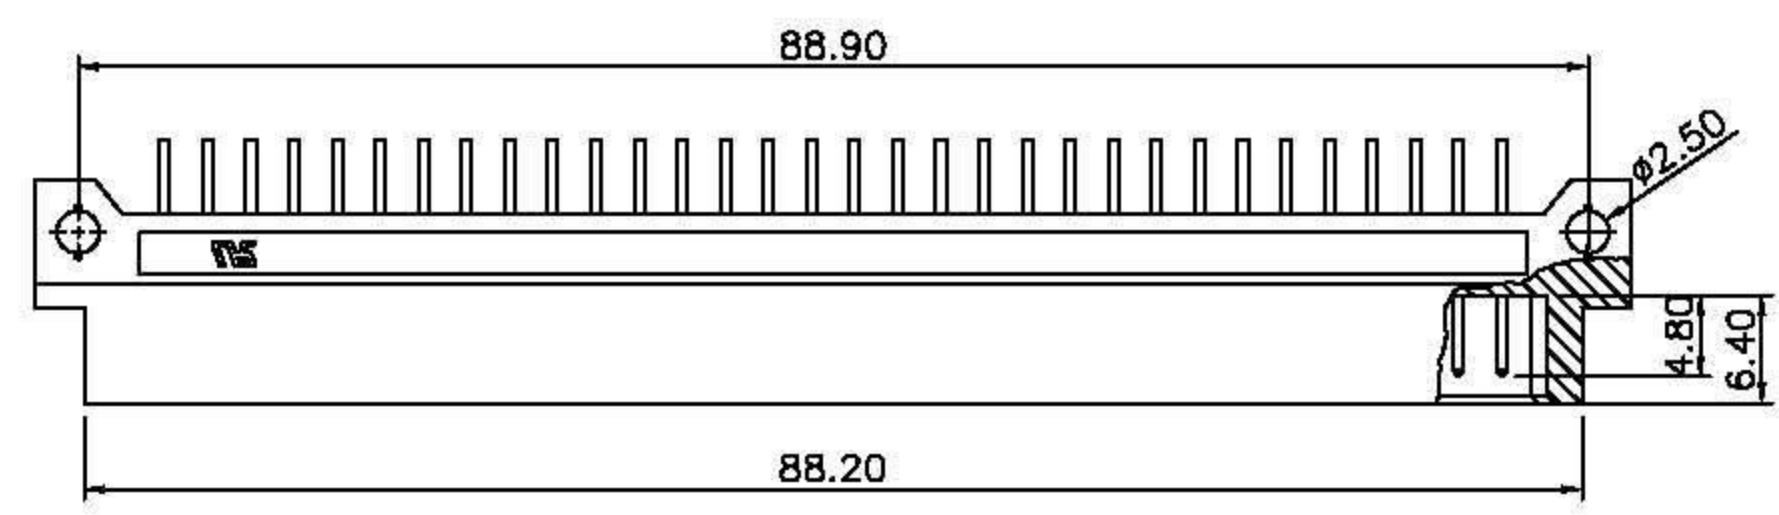




Material:

Housing: 30% Glass Filled PBT UL94V-0.
 Contacts: Brass.

Electrical Characteristics:

Current Rating: 2 A.
 Dielectric Withstanding Voltage: AC 1000V for 1minute.
 Insulator Resistance: 1000MΩ min. at DC 500V.
 Contact Resistance: 30mΩ max. at DC 100m A.
 Operating Temperature: -55°C ~ +105°C .

*** RoHS Compliant**

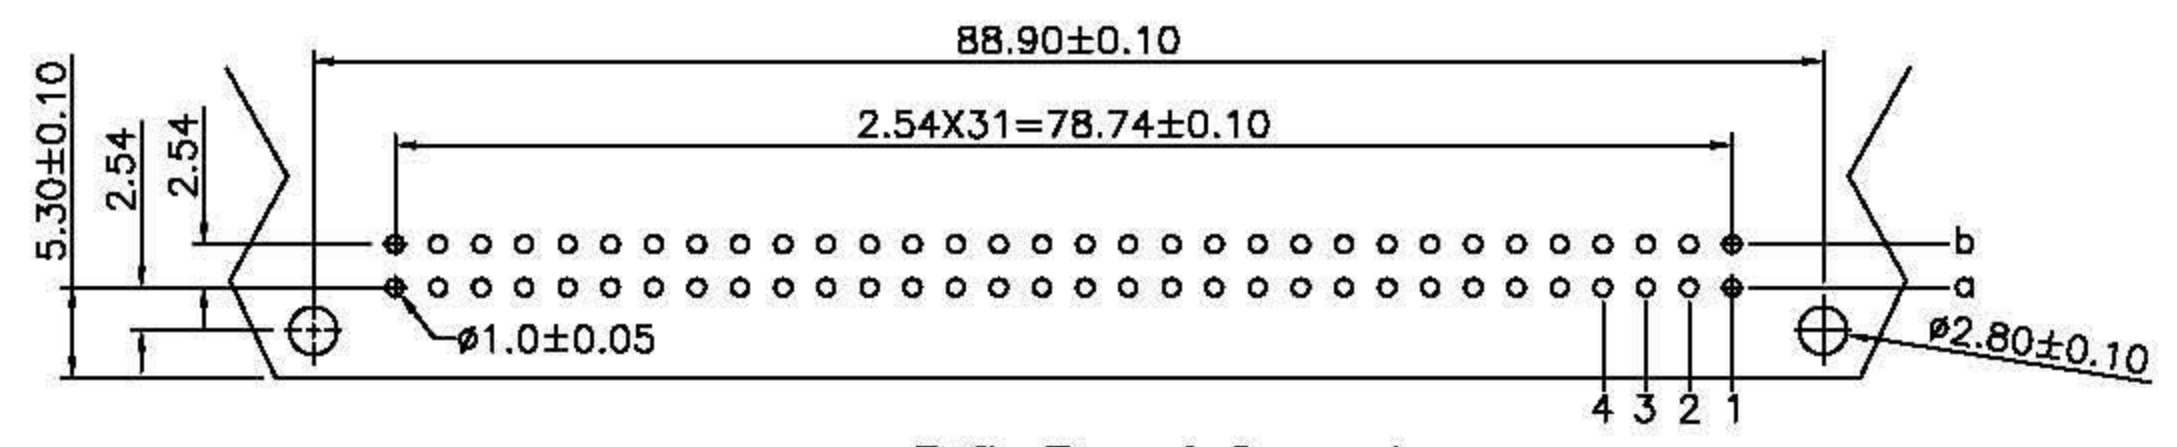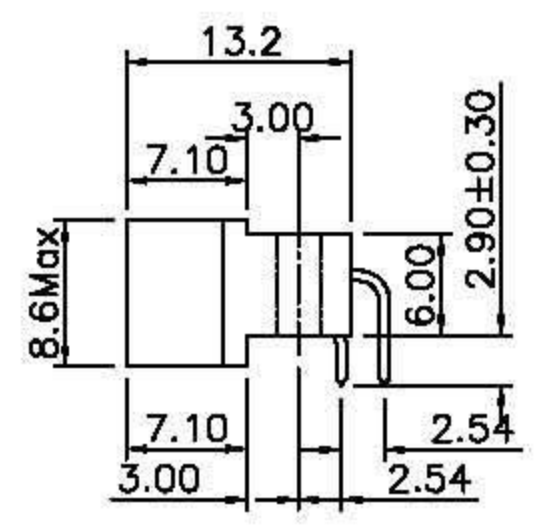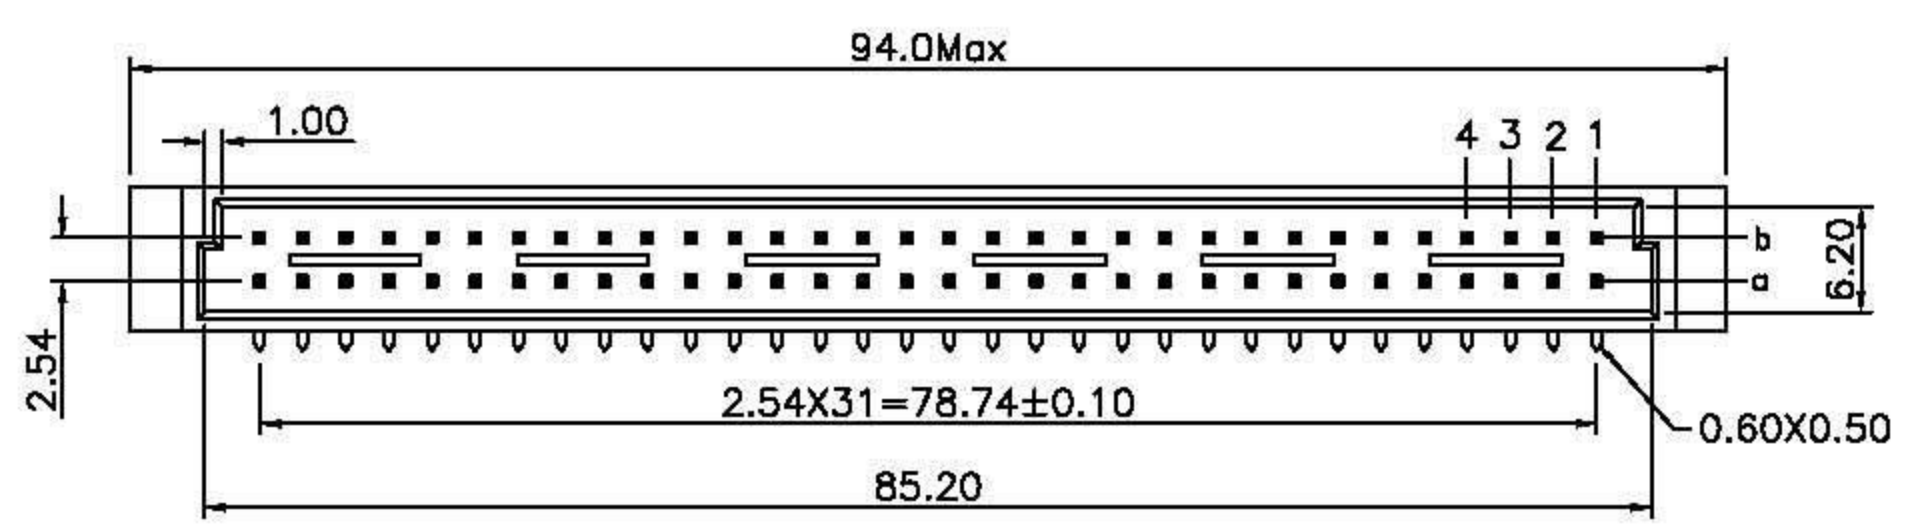

P.C. Board Layout

Tolerances x = ±0.5 .x = ±0.25 .xx = ±0.15	Drawn No.	Title:		GXCON ENTERPRISE CO., LTD				
	Projection							P/N: DIN-264M200A
	Unit mm	Scale	1:1	DIN41612 B Type Male		SHEET	1/1	
Drawn By	Liquihua10/22'07							