

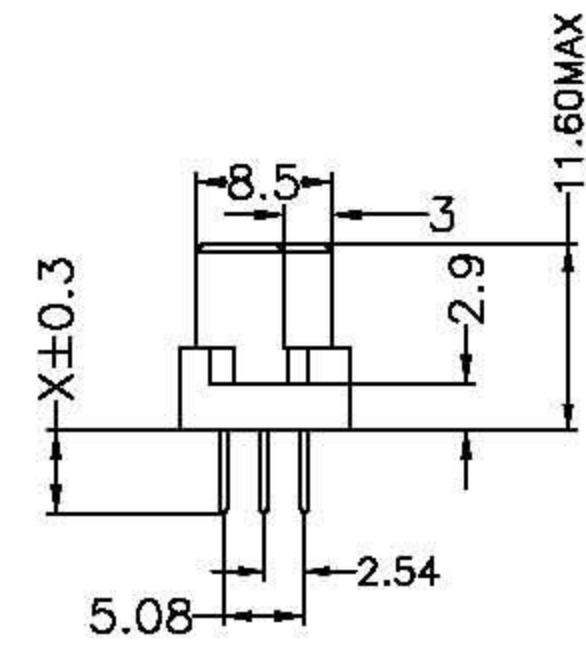
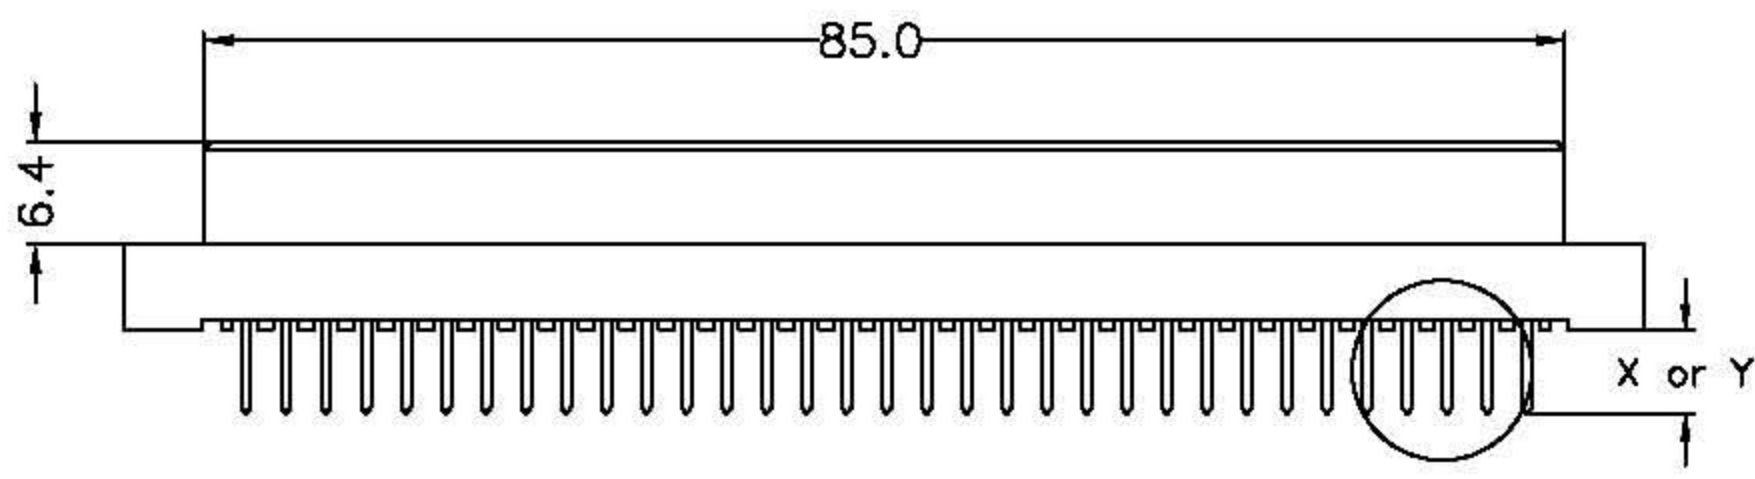
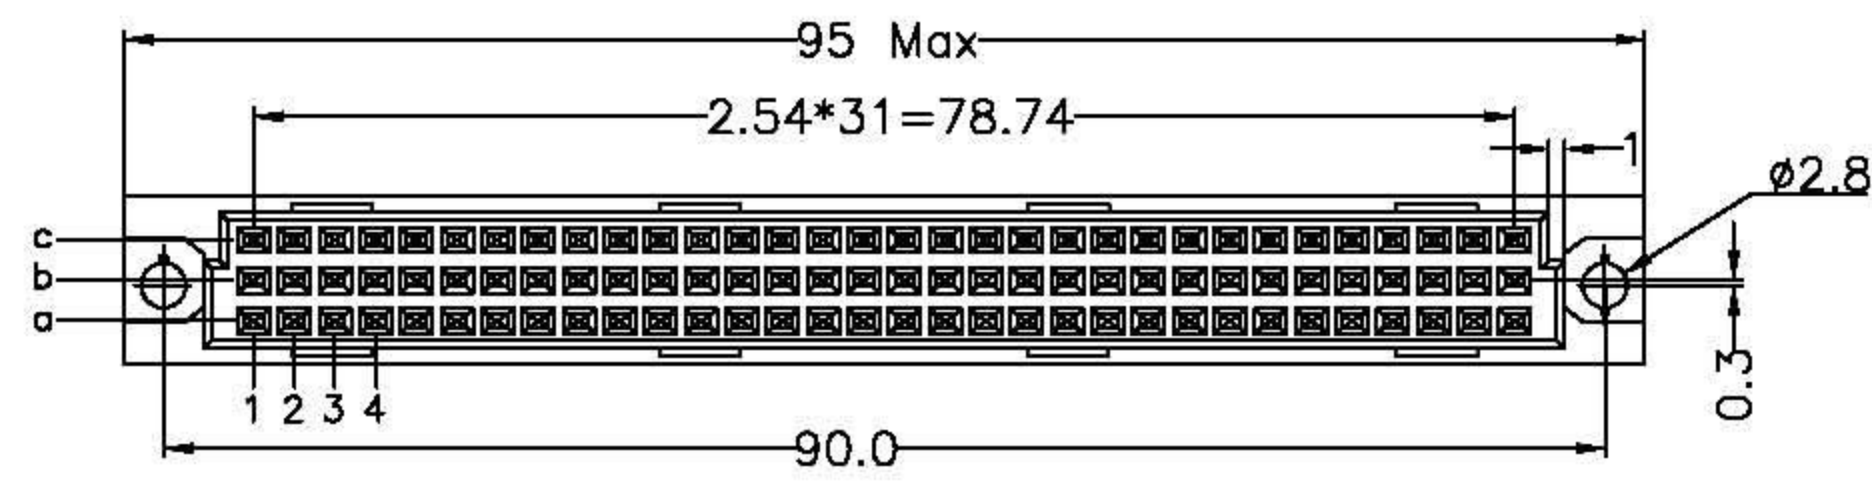
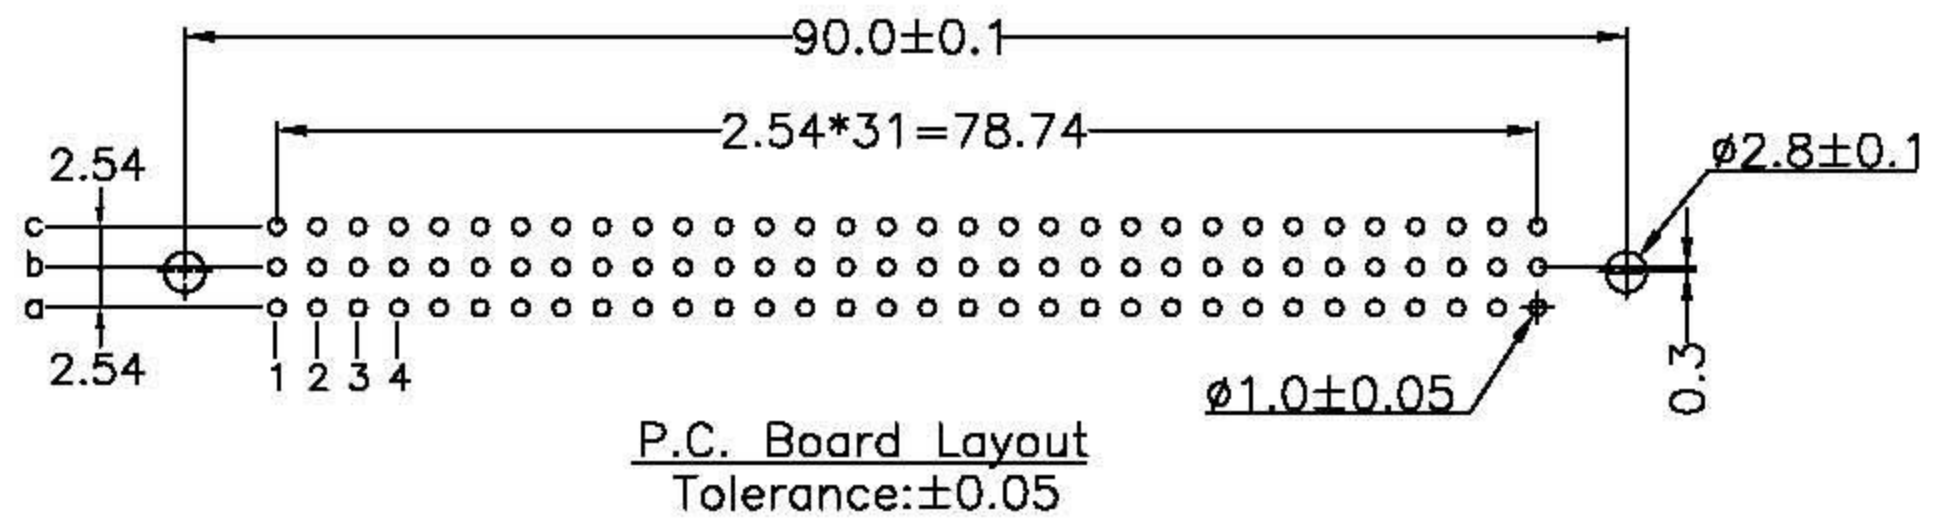


REV.	SPECIFICATION	ECN NO.	APPD.
A5		09/28'06	

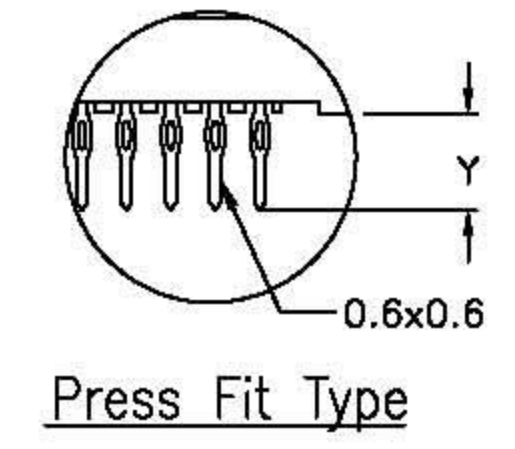

Material:
Housing: 30% Glass filled PBT UL94V-0.
Contacts: Phosphor Bronze.
Electrical Characteristics:
Current Rating: 2 AMP.
Dielectric Withstanding Voltage: AC 1000V For 1 minute.
Insulator Resistance: 1000MΩmin. at DC 500V.
Contact Resistance: 30mΩmax. at DC 100mA.
Operating Temperature: -55°C~+105°C .
 *RoHS Compliant

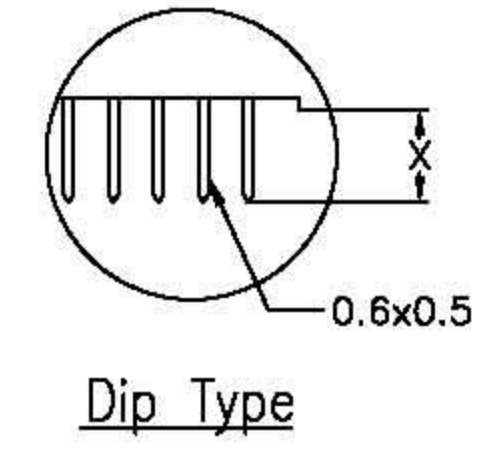

Pitch	Position	Rows with Contacts	Contact Arrange	P/N.
2.54mm	96	a b c		DIN-396F100A
	64	a - c		DIN-364F100A

Tolerances	Drawn No.		
x = ±0.5	Projection		
.x = ±0.25	Unit mm	Scale	1:1
.xx = ±0.15	Drawn By	Li guihua	

Title:			
DIN41612 C Type			
GXCON ENTERPRISE CO., LTD			
P/N: DIN-396F100A			
SHEET	1/1	Ver.No.	A5