




FFC/FPC Connector 0.5mm(0.02") ZIF Type

GXCON

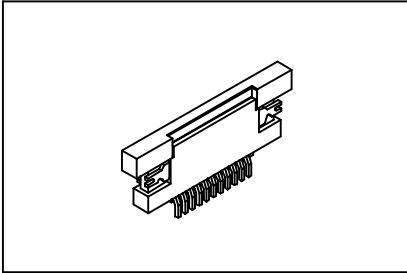

Material:
Housing:High temperature housing UL94V-0 withstands IR and VPR soldering methods.
Contacts:Phosphor Bronze.
Leg: Brass.
Plating:Tin plated.
Electrical Characteristics:
Current Rating:0.4 AMP max.
Insulator Resistance:5000MΩmin. at DC 500V.
Contact Resistance: 20mΩmax. at DC 100mA.
Operating Temperature: -65°C~+125°C.

- Features:**
 * ZIF, Surface Mount.
 * Size 4 through 50 available.
 * For 0.30mm(0.0118") thick FFC/FPC.

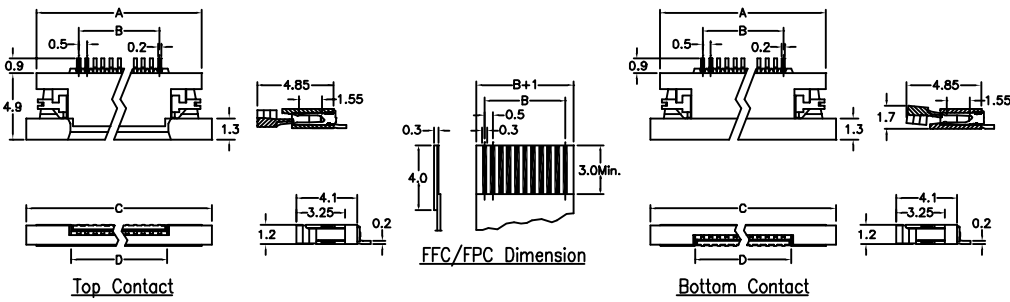

Position	4 Thru 50
A±0.15	(No. of Positions-1)X0.5+5.25
B±0.10	(No. of Positions-1)X0.5
C±0.15	(No. of Positions-1)X0.5+6.50
D+ ^{0.10} / _{-0.05}	(No. of Positions-1)X0.5

Ordering information

EC02— 50 2 3 1
 Series No. of Pin Count 2: Tin Plated 3: S.M.D. Type 1: Top Contact 2: Bottom Contact