


FFC/FPC Connector 1.0mm(0.039") SMD ZIF Type

GXCON

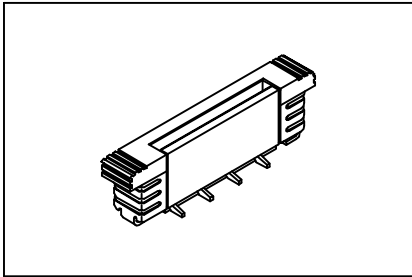

Material:

Housing: High temperature housing UL94V-0 withstands IR and VPR soldering methods.

Actuator: PPS.

Contacts: Phosphor Bronze.

Leg: Phosphor Bronze.

Plating: Tin plated.

Electrical Characteristics:

Current Rating: 0.5 AMP.


Insulator Resistance: 100MΩmin. at DC 500V.

Contact Resistance: 20mΩmax. at DC 100mA.

Operating Temperature: -55°C~+85°C.

Features:

- * ZIF, Surface Mount.
- * Size 4 through 24 available.
- * For 0.30mm(0.0118") thick FFC/FPC.

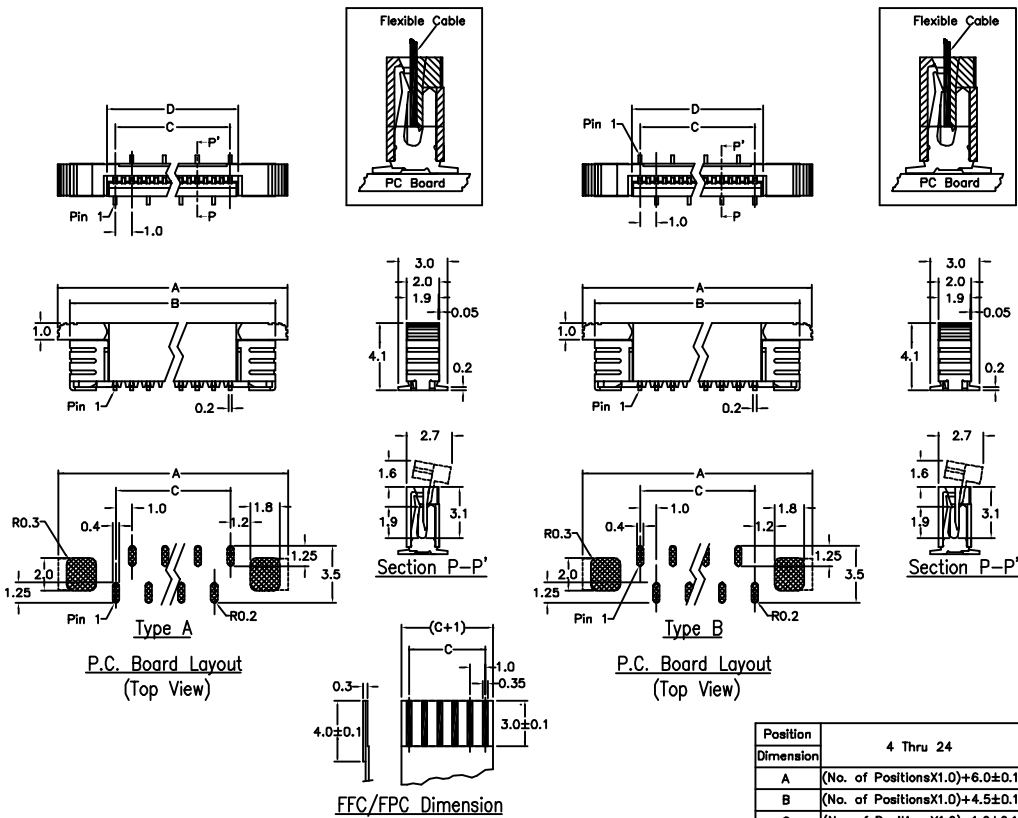

Position Dimension	4 Thru 24
A	(No. of Positions×1.0)+6.0±0.15
B	(No. of Positions×1.0)+4.5±0.15
C	(No. of Positions×1.0)-1.0±0.1
D	(No. of Positions×1.0)+1.1 ^{+0.1} _{-0.0}

Ordering information

FC15- 24 2 3 3 A / Z
 Series No. of Pin Count 2: Tin Plated S.M.D. Type 3: Vertical Top *Foot Print Z: Zig Zag Layout
 Type A & B