


FFC/FPC Connector 1.25mm(0.049") Non ZIF Type **GXCON**

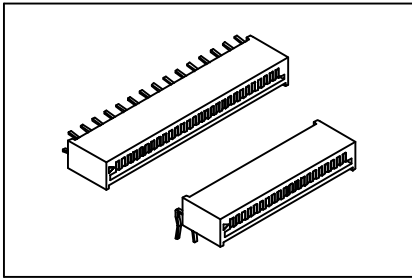

Material:




Housing: 30% Glass filled PBT UL94V-0.
Contacts: Phosphor Bronze.
Plating: Tin plated.

Electrical Characteristics:

Current Rating: 1 AMP.
Insulator Resistance: 5000MΩmin. at DC 500V.
Contact Resistance: 20mΩmax. at DC 100mA.
Operating Temperature: -55°C~+105°C.

Features:

- * Size 3 through 36 available.
- * Straight & right angle, Non-ZIF.
- * For 0.30mm(0.0118") thick FFC/FPC.

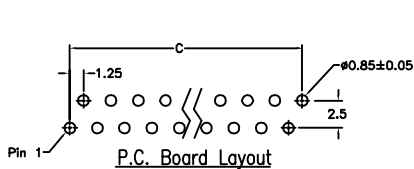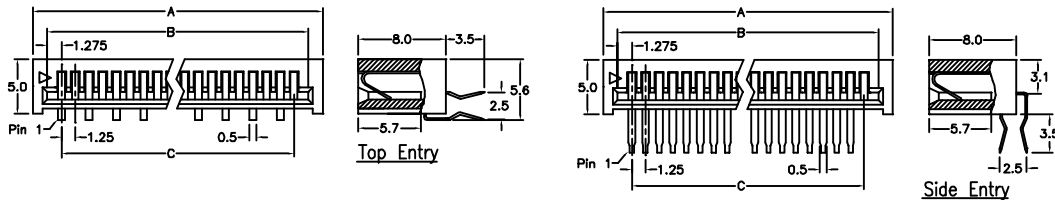

Position	3 Thru 36
Dimension	
A	(No. of Positions X 1.25)+3.4
B	(No. of Positions X 1.25)+1.3
C	(No. of Positions X 1.25)-1.25

Ordering information

FC21- 36 2 S
 Series No. of Pin Count 2: Tin Plated S: Top Entry (Straight)
 R: Side Entry (Right Angle)