


I.D.C. Socket 1.27mmX2.54mm(0.050"X0.100")

GXCON

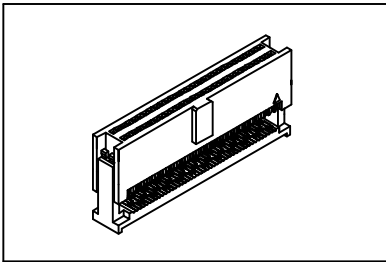

Material:

Housing: 30% Glass filled PBT UL94V-0.

Contacts: Phosphor Bronze.

Plating: Selective gold plated: gold plated on mating area and nickel plated on wire cutting area.

Cable: 0.635mm(0.025") pitch flat cable.

Electrical Characteristics:

Current Rating: 1 AMP.





Insulator Resistance: 5000MΩmin. at DC 500V.

Contact Resistance: 20mΩmax. at DC 100mA.

Operating Temperature: -55°C~+105°C.

Features:

- * Choices of Black or Grey insulator.
- * Optional polarizing bump.

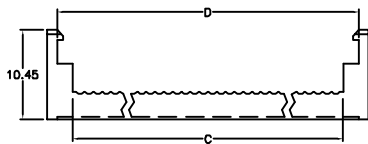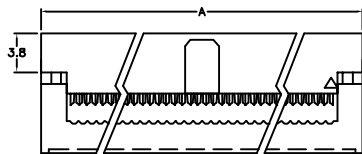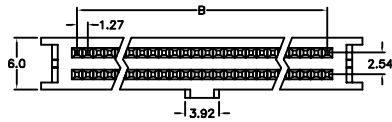

Position	Dimension			
	A	B	C	D
20	18.55	11.43	12.60	16.25
28	22.36	15.24	16.41	20.06
32	26.17	19.05	20.22	23.87
34	27.44	20.32	21.49	25.14
40	31.25	24.13	25.30	28.95
50	37.60	30.48	31.65	35.30
52	38.87	31.75	32.92	36.57
60	43.95	36.83	38.00	41.85
68	49.03	41.91	43.08	46.73
80	56.65	49.53	50.70	54.35
100	69.35	62.23	63.40	67.05

Ordering information

IDC22-100 1 B 2
 Series No. of 1: Gold Plated B: Black 2: Without Strain Relief
 Pin Count *Y: Grey