


P.C.B. Socket 2.0mm(0.079")

GXCON

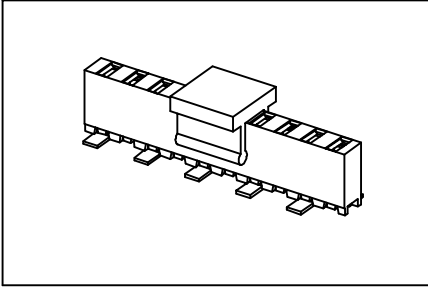

Material:

Housing: 30% Glass filled LCP UL94V-0.

Contacts: Phosphor Bronze.

Plating: Gold plated over nickel.

Tin plated over nickel.

Electrical Characteristics:

Current Rating: 1 AMP.


Insulator Resistance: 5000MΩmin. at DC 500V.

Contact Resistance: 20mΩmax. at DC 100mA.

Operating Temperature: -65°C ~ +125°C .

Features:

- * Surface Mount.
- * Low profile 4.0mm(0.161").
- * Two choice of foot print.
- * Mates with 0.5mm(0.02") sq. pin.

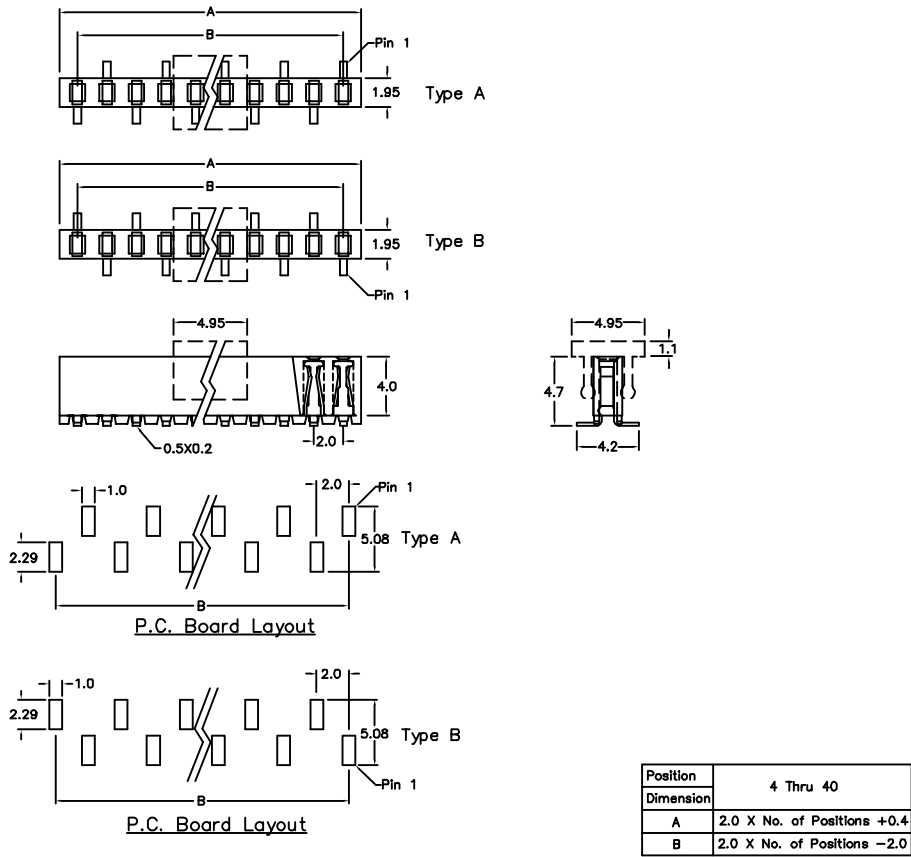

Ordering information

PS13- 1 10 1 3 A I L - P1
 Series Single Row No.of Pin Per Row 1:Gold plated Surface Mount A: Type A B: Type B T:Tape & Reel Package U:Tube Package LCP Material Blank:W/O Pad P1:Plastic Pad P2:Metal Pad P3:Tape Seal