


Pin Header 2.54mmX2.54mm(0.100"X0.100")

GXCON

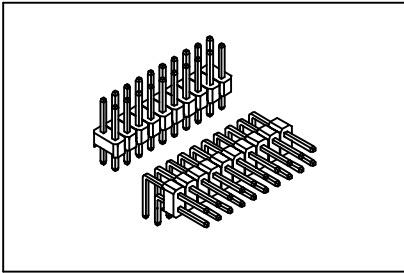

Material:

Housing: 30% Glass filled PBT UL94V-0.

Contacts: Brass.

Plating: Gold plated over nickel.

Tin plated over nickel.

Electrical Characteristics:

Current Rating: 1 AMP.


Insulator Resistance: 5000MΩmin. at DC 500V.

Contact Resistance: 20mΩmax. at DC 100mA .

Operating Temperature: -55°C ~ +105°C .

Features:

- * Available in Straight and Right angle.
- * Side-to-side and end-to-end stackable.
- * Custom design offered.

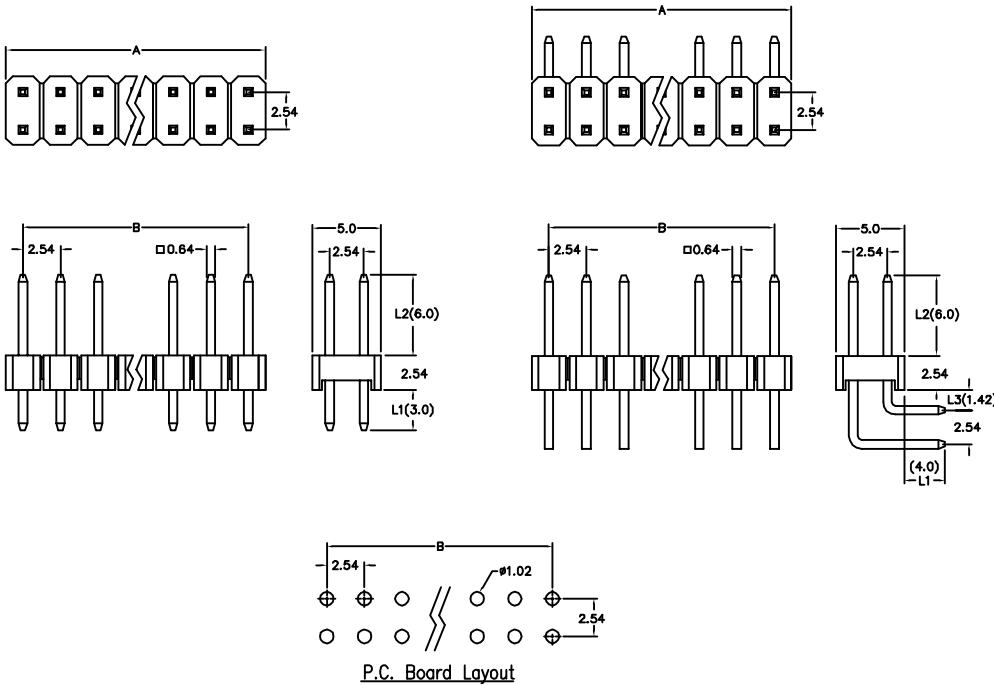

Position	4 Thru 80
Dimension	
A	2.54 X No. of Positions /2
B	2.54 X No. of Positions /2-2.54

Ordering information

PH01- 2 40 1 1
 Series Double Row No. of 1: Gold Plated 1: Straight
 Pin Per Row 2: Tin Plated 2: Right Angle

Custom Design: Straight (i.e. PH01-24011/L1 /L2)
 Right Angle (i.e. PH01-24012/L1 /L2 /L3)