


Pin Header 2.0mmX2.0mm(0.079"X0.079")

GXCON

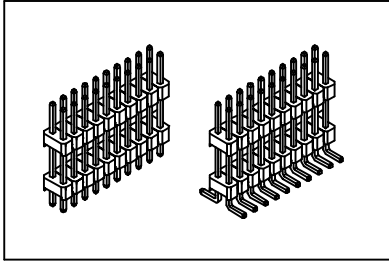

Material:

Housing: 30% Glass filled PBT UL94V-0 for DIP Type.
High temperature housing withstands IR and VPR soldering methods for SMD Type.

Contacts: Brass.

Plating: Gold plated over nickel.
Tin plated over nickel.

Electrical Characteristics:

Current Rating: 1 AMP.

Insulator Resistance: 5000MΩmin. at DC 500V.


Contact Resistance: 20mΩmax. at DC 100mA.

Operating Temperature: -55°C~+105°C for DIP Type.
-65°C~+125°C for SMD Type.

Max Processing Temperature: 230°C for 30~60 seconds.

Features:

- * Low profile insulator 2.00mm(0.079")
- * Available in both Single and Double row.
- * Available in Straight.
- * Dual insulator offers high versatility and stability.

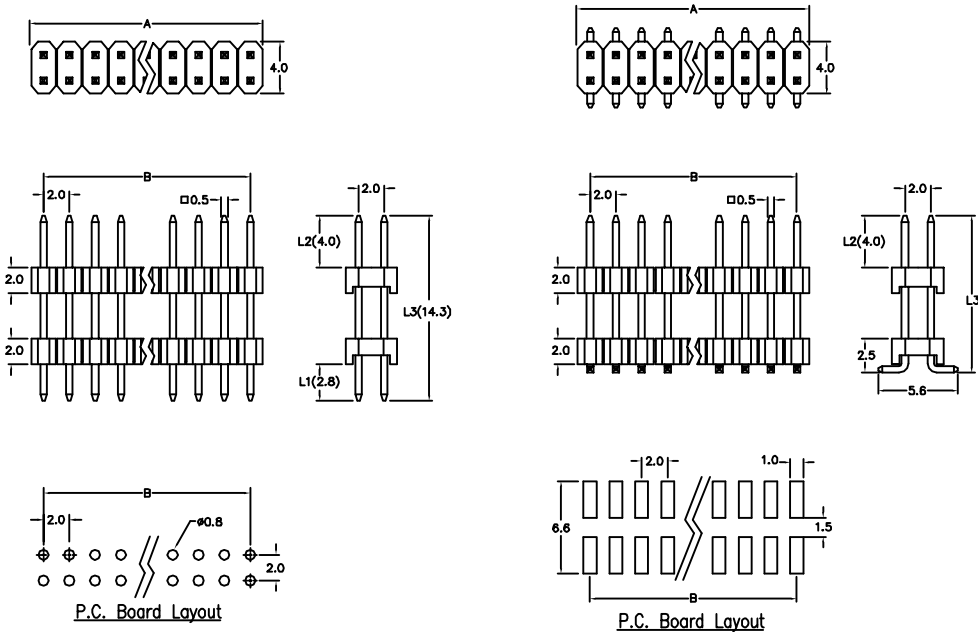

Position	4 Thru 80
Dimension	
A	2.0 X No. of Positions /2
B	2.0 X No. of Positions /2-2.0

Ordering information

PH14- 2 40 1 1 /L1 /L2 /L3
 Series 2: Double Row No.of 1: Gold Plated 1: Straight
 Pin Per Row 2: Tin Plated 3: S.M.D Type
 Custom Design: Straight (i.e. PH14-24011/L1 /L2 /L3)
 Surface mount (i.e. PH14-24013/L2 /L3)