Pin Header 2.0mmX2.0mm(0.079"X0.079")

GXCON



Material:

Housing: High temperature housing withstands IR and VPR soldering methods.
Contacts: Brass.
Plating: Gold plated over nickel.
Tin plated over nickel.

Electrical Characteristics:

Current Rating: 1 AMP.
Insulator Resistance: 5000MΩmin. at DC 500V.
Contact Resistance: 20mΩmax. at DC 100mA.
Operating Temperature: −65℃ ~+125℃.

Features:

* Surface Mount
* Low profile insulator 1.50mm(0.059").
* Side-to-side and end-to-end stackable.
* Custom design provides wide product flexibility.







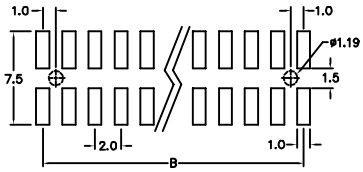

P.C. Board Layout

Position	4 Thru 80
Dimension	
A	2.0 X No. of Positions /2
B	2.0 X No. of Positions /2−2.0

Ordering information

PH15−	2	40	1	3	P /L1/L2/L3
Series	Double Row	No. of Pin Per Row	1: Gold Plated 2: Tin Plated 3: Selective Gold Plated	3: Surface Mount	P: With Post N: Without Post

PDF 文件使用 "pdfFactory Pro" 试用版本创建 www.fineprint.cn