


SCSI 1.27mm(0.05") Centronic Female Dip Type

GXCON

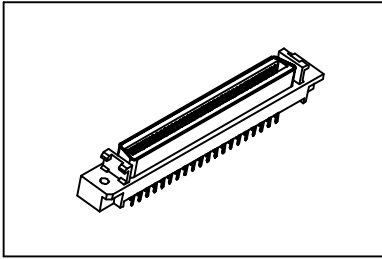

Material:






Housing: 30% Glass filled PBT UL94V-0.
 Contacts: Phosphor Bronze.
 Shell: Zinc Alloy.

Electrical Characteristics:

Current Rating: 1 AMP.
 Dielectric Withstanding Voltage: AC 1000V For 1 minute.
 Insulator Resistance: 1000MΩmin. at DC 500V.
 Contact Resistance: 30mΩmax. at DC 100mA.
 Operating Temperature: -55°C ~ +105°C.

Features:

- * 1.27mm Pitch.
- * 80Pin Female.

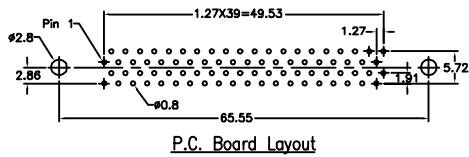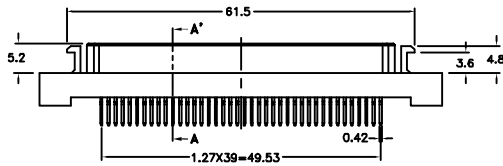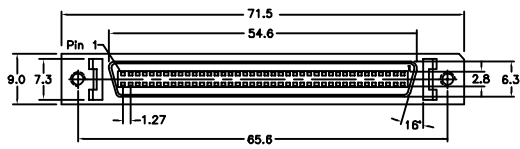

Ordering information

SC05-	80	F	D	3	10
Series	Position	Female	Lock Latch Type	3: Selective Gold Plated	10: 10 μ" 15: 15 μ" 30: 30 μ"