


6012 Series

IEEE 1394 6Pin Horizontal Upright Type

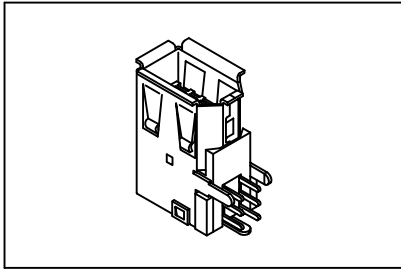

Material:


Housing: LCP UL94V-0.
 Contacts: Phosphor Bronze.
 Plating: Selective Gold Plated.

Electrical Characteristics:

Current Rating: 1 AMP.
 Insulator Resistance: 1000MΩmin. at DC 500V.
 Contact Resistance: 30mΩmax. at DC 100mA.
 Operating Temperature: -40°C~+105°C.

Features:

- * Compact and low profile design for saving space.
- * High reliable contact with low insertion force.
- * Straight and right angle type facilitate engineering design.

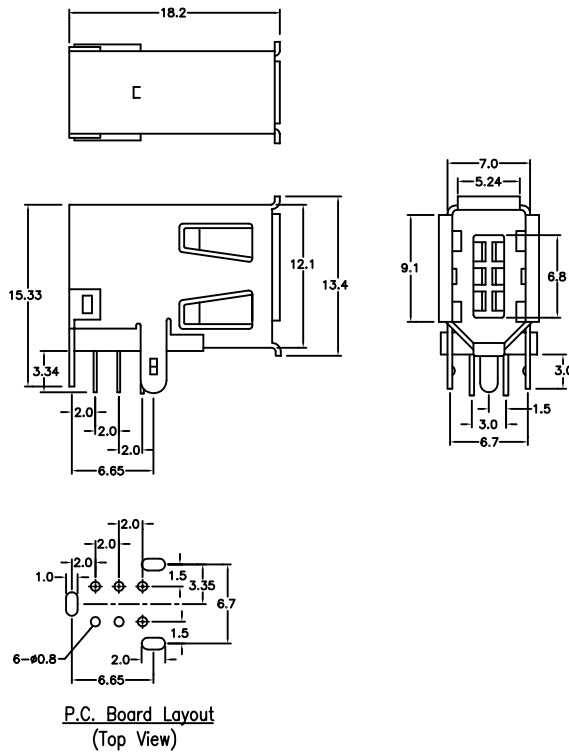

Ordering information

<u>6012-</u>	<u>06</u>	<u>3</u>	<u>10</u>	<u>W</u>
Series	Position	3: Selective Gold Plated	10: Upright	W: Natural LCP B: Black LCP