
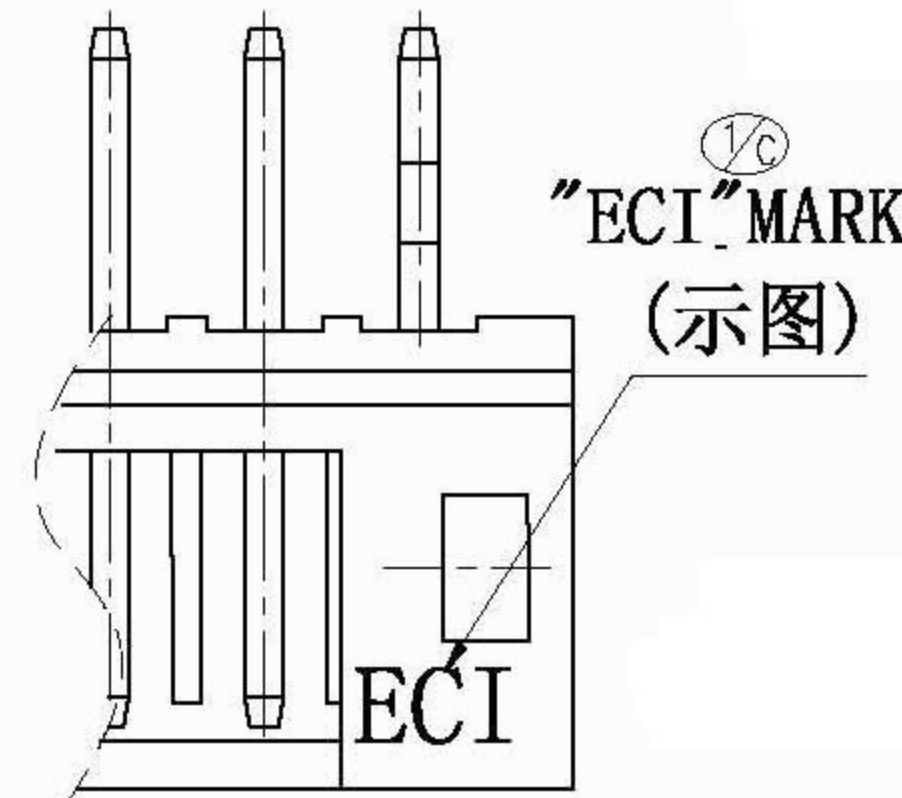



NOTES:

- CURRENT RATING: 2A AC/DC
- VOLTAGE RATING: 100V AC/DC
- TEMPERATURE RANGE: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
- CONTACT RESISTANCE: 20m Ω MAX
- INSULATION RESISTANCE: 1000M Ω MIN
- WITHSTANDING VOLTAGE: 800V AC/MINUTE

Dim "L"	3.40 \pm 0.20mm
	3.10 \pm 0.20mm
	3.00 \pm .20mm
	2.80 \pm .20mm

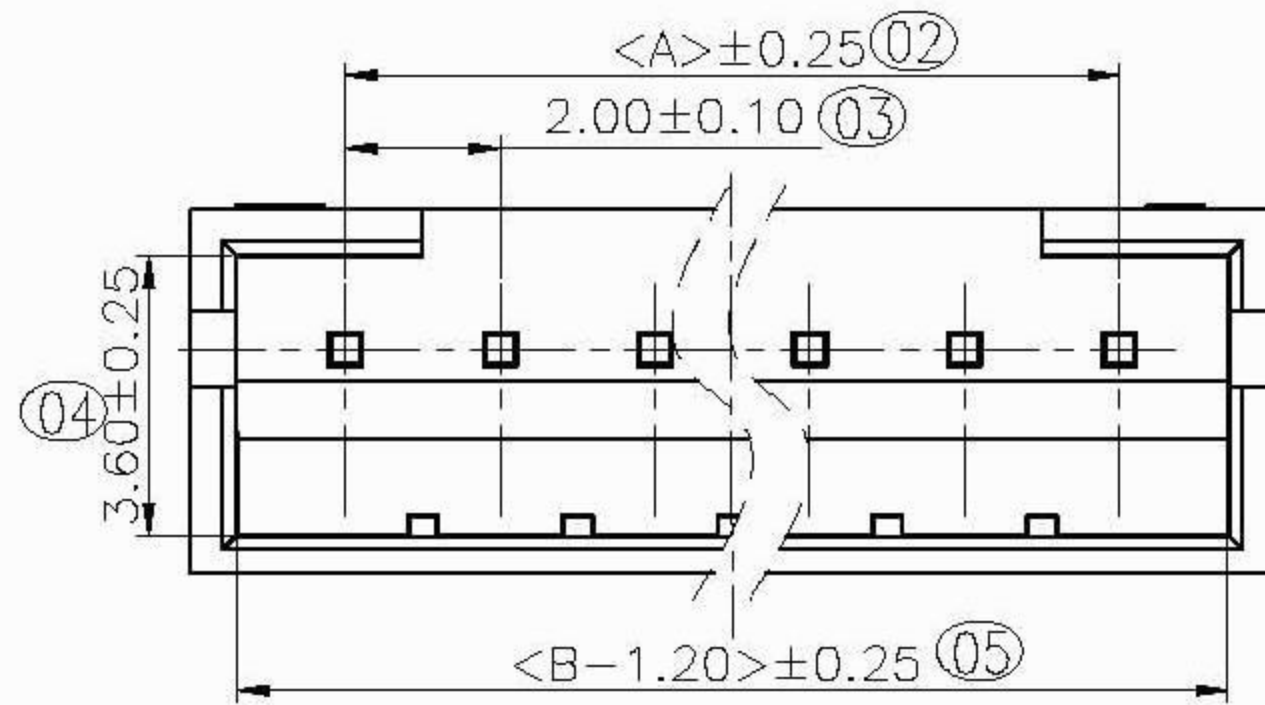

Recommended P.C.B Layout (Top Side)
P.C.B Thickness = 1.20mm
(Tolerance = ± 0.05)

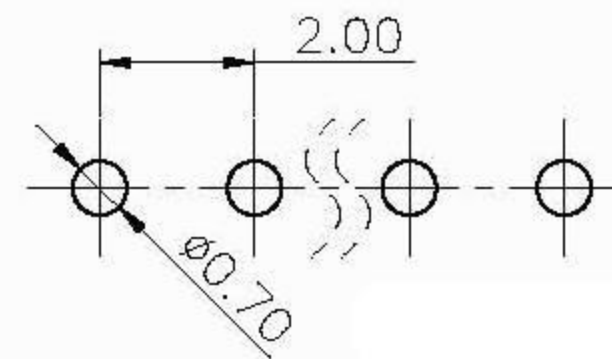

PART NO.	Dimensions	
	A	B
WF2000S02	2.00	6.00
WF2000S03	4.00	8.00
WF2000S04	6.00	10.00
WF2000S05	8.00	12.00
WF2000S06	10.00	14.00
WF2000S07	12.00	16.00
WF2000S08	14.00	18.00
WF2000S09	16.00	20.00
WF2000S10	18.00	22.00
WF2000S11	20.00	24.00
WF2000S12	22.00	26.00
WF2000S13	24.00	28.00
WF2000S14	26.00	30.00
WF2000S15	28.00	32.00
WF2000S16	30.00	34.00

GXCON ENTERPRISE CO., LTD

DIM	TOL	DIM	TOL
X.	/	X'	/
X.X	± 0.25	X.X'	$\pm 2'$
X.XX	± 0.20	X.XX'	$\pm 1'$
X.XXX	± 0.10	X.XXX'	/

DRAW NO.	DATE	P/N NO:	DRAW NAME:
DESIGN:		WF2000SXX	PH2.0 180° DIP Wafer
CHECK:			
REVIEW:		REV. D	SCALE 1:1
		UNIT: mm	SHEET: 1 OF 1