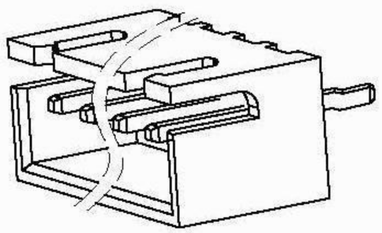

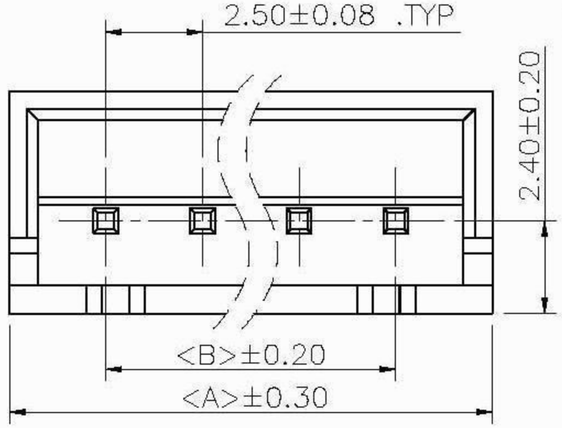

Recommended P.C.B Layout(Top Side)

P.C.B Thickness = 1.20mm
(Tolerance=±0.05)

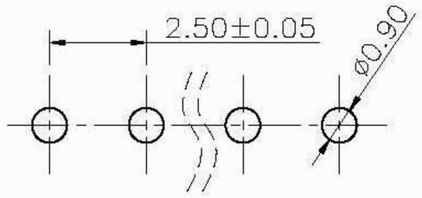

NOTES:

PART NO. : SY2501-WV-XP
Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -25°C~+85°C
Contact Resistance: 20m Ω max
Insulation Resistance:1000M Ω min
Withstanding Voltage: 800V AC/minute
Material: PA66 UL 94V-0

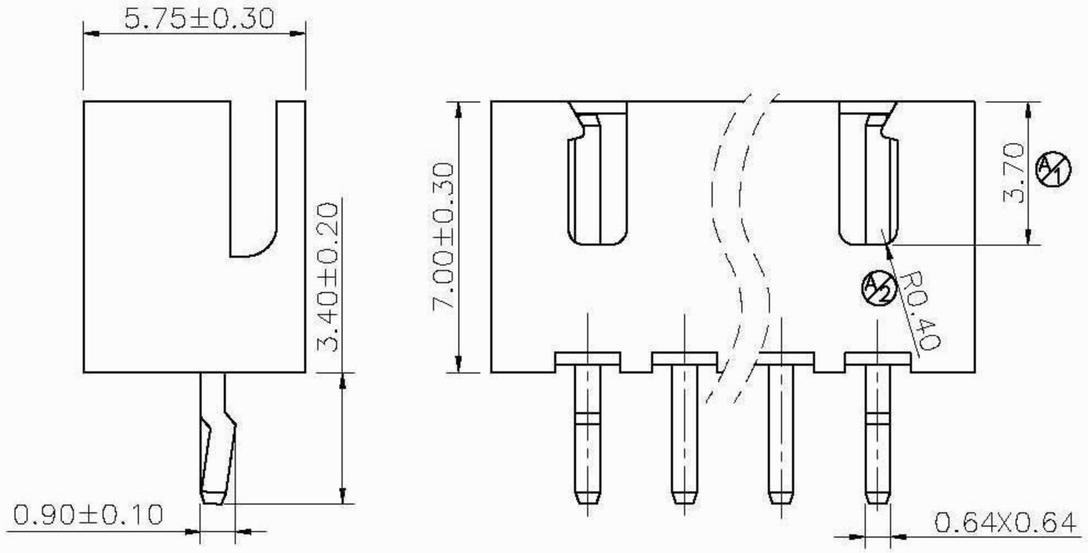

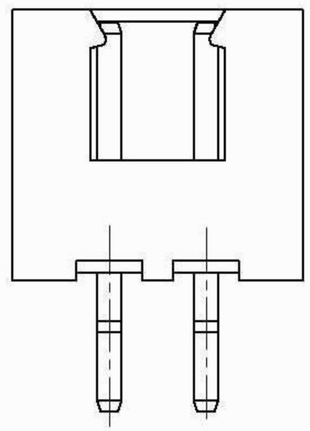

2P视图

PART NO. (90°)	Dimensions	
	A	B
WF2501S02	7.50	2.50
WF2501S03	10.00	5.00
WF2501S04	12.50	7.50
WF2501S05	15.00	10.00
WF2501S06	17.50	12.50
WF2501S07	20.00	15.00
WF2501S08	22.50	17.50
WF2501S09	25.00	20.00
WF2501S10	27.50	22.50
WF2501S11	30.00	25.00
WF2501S12	32.50	27.50
WF2501S13	35.00	30.00
WF2501S14	37.50	32.50
WF2501S15	40.00	35.00
WF2501S16	42.50	37.50

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE
A	01/18/07'	A1:3.90->3.70 A2:增加倒角 A3:增加2P视图		
0	01/20/06'	NEW	———	———

OPERATION	
~ 10	±0.15
20 ~ 30	±0.30
30 ~	±0.50
Angle	± 2°
DIM	TOL

DRAW		01/20/06'
DESIGN		01/20/06'
CHECK		01/20/06'
APPROVE		01/20/06'

SCALE	4:1
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

GXCON ENTERPRISE CO., LTD

PART NO.	WF2501SXX
TITLE:	XH 2.50 180° WAFER
DRAWING NO.	