
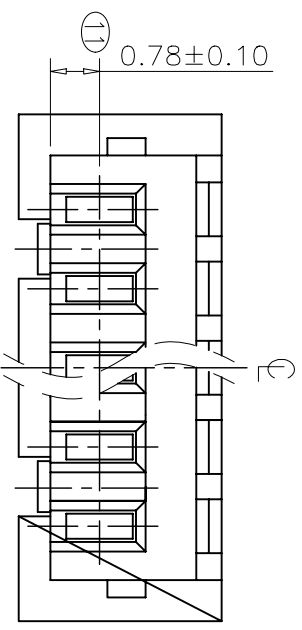
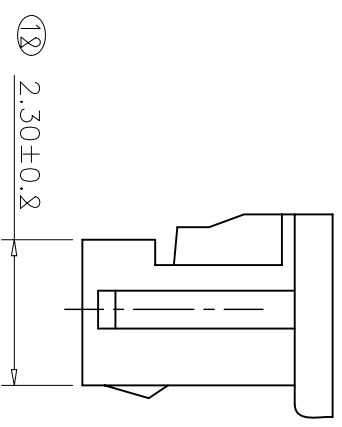
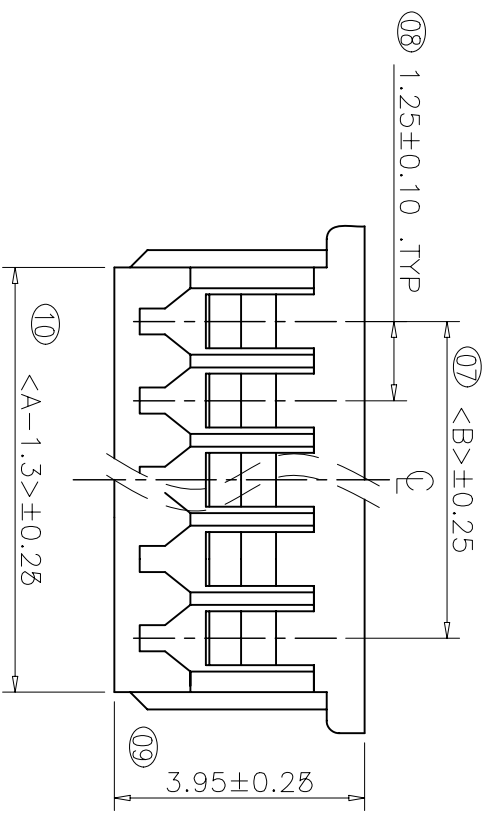


REV.	ECN NO.	DESCRIPTION	DATE	DESIGN
A		依工程图升级	09/18/06	郭渭华
B		依工程图升级	09/23/06	郭渭华
C	NAE08055	依工程图升级	06/10/08	陈拱烽

NOTES:
 CURRENT RATING: 1A AC/DC
 VOLTAGE RATING: 125V AC/DC
 TEMPERATURE RANGE: -25°C~+85°C
 CONTACT RESISTANCE: 20mΩ MAX
 INSULATION RESISTANCE:500MΩ MIN
 WITHSTANDING VOLTAGE:500V AC/MINUTE
 MATERIAL: PA66 本色
 P/N : HS31-XXH

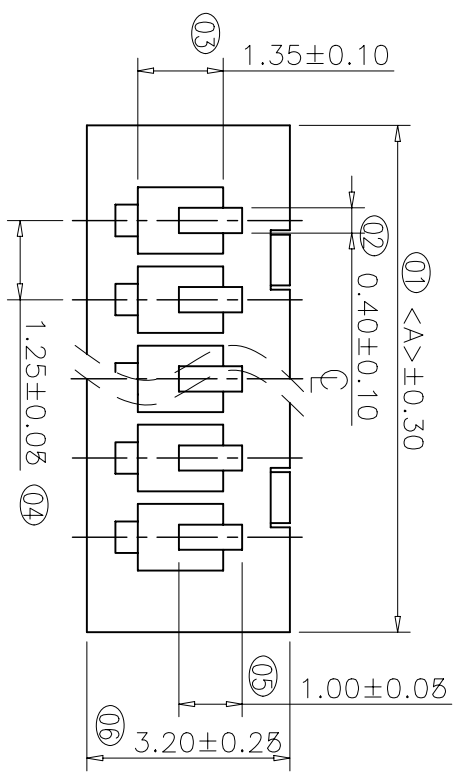

PART NO.	Dimensions	
	A	B
HS31-02H	4.25	1.25
HS31-03H	5.50	2.50
HS31-04H	6.75	3.75
HS31-05H	8.00	5.00
HS31-06H	9.25	6.25
HS31-07H	10.50	7.50
HS31-08H	11.75	8.75
HS31-09H	13.00	10.00
HS31-10H	14.28	11.25
HS31-11H	15.50	12.50
HS31-12H	16.78	13.75
HS31-13H	18.00	15.00
HS31-14H	19.25	16.25
HS31-15H	20.50	17.50
HS31-16H	21.75	18.75

GXCON ENTERPRISE CO.,LTD.

DRAW NO.:	SYMX001P	DATE:	12/29/05	P/N NO.:	HS31-XXH	DRAW NAME:	WX 1.25 Housing
DESIGN:	郭渭华	CHECK:		REV. C	SCALE 1:1	UNIT:	mm
CHECK:		REVIEW:				SHEET:	1 of 1

DIM	TOL	DIM	TOL
X.	/	X.	/
XX	±0.25	XX	±2°
XXX	±0.20	XXX	±1°
XXXX	±0.10	XXXX	/