

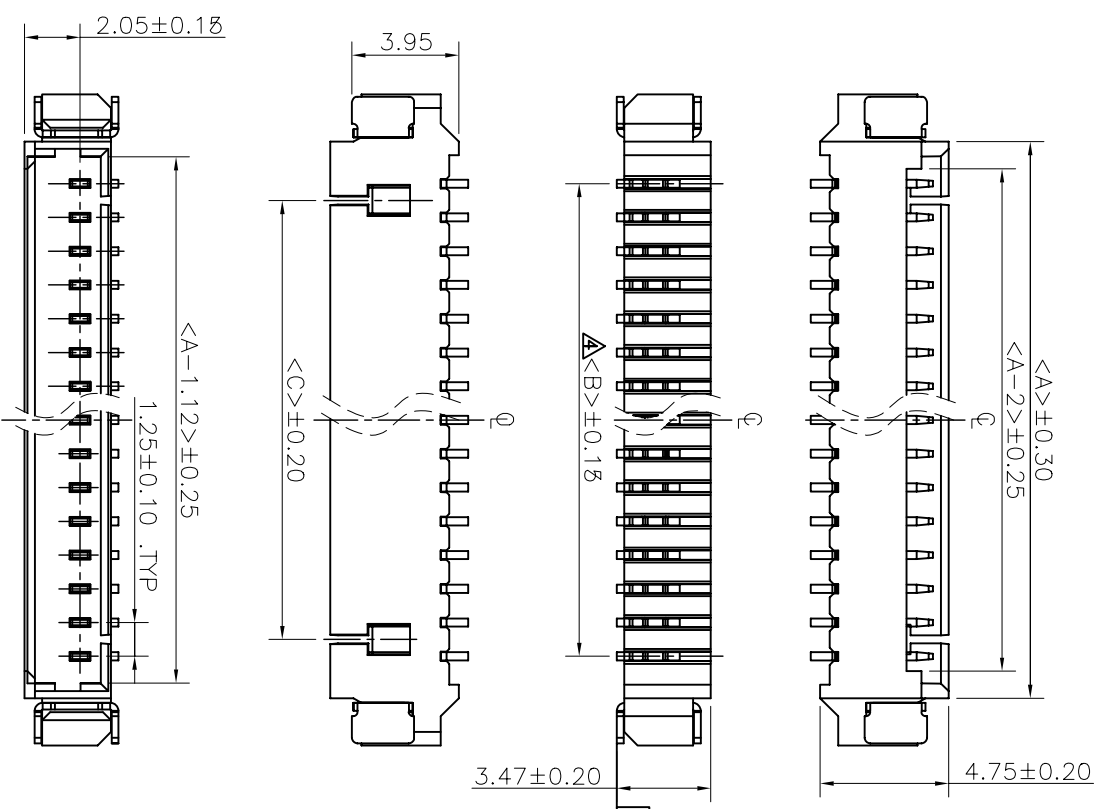


1 2 3 4 5 6 7 8 9 10

Recommended P.C.B Layout(Top Side)
P.C.B Thickness = 1.20mm (Tolerance=±0.05)

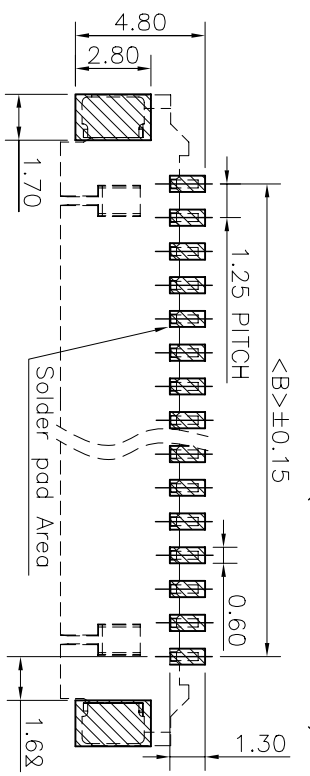

NOTES:

PART NO. : WF31-XX231T
Current Rating: 1A AC, DC
Voltage Rating: 125V AC, DC
Temperature Range: -25°C to +85°C
Contact Resistance: 20m max
Insulation Resistance: 100M min
Withstanding Voltage: 250V
Material: PA6T UL 94V-0

PART NO.	Dimensions		
	A	B	C
WF31-02231T	4.25	1.25	
WF31-03231T	5.50	2.50	
WF31-04231T	6.75	3.75	2.50
WF31-05231T	8.00	5.00	3.75
WF31-06231T	9.25	6.25	5.00
WF31-07231T	10.50	7.50	6.25
WF31-08231T	11.75	8.75	7.50
WF31-09231T	13.00	10.00	8.75
WF31-10231T	14.25	11.25	10.00
WF31-11231T	15.50	12.50	11.25
WF31-12231T	16.75	13.75	12.50
WF31-13231T	18.00	15.00	13.75
WF31-14231T	19.25	16.25	15.00
WF31-15231T	20.50	17.50	16.25

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	DESIGN	CHECK	APPROVE	SCALE	PART NO.	TITLE:	DRAWING NO.
A	11/30/06	增加2~3pin产品示意图			~ 10 ±0.15	郭渭华	郭渭华	黄能健		4:1	WF31-XX231T	MOLEX 1.25 90° SMT Water	WF31-XX231T
0	01/02/06	NEW			20 ~ 30 ±0.30	肖始念	肖始念			1/1			

1 2 3 4 5 6 7 8 9 10

H G F E D C B A

GXCON ENTERPRISE CO.,LTD.